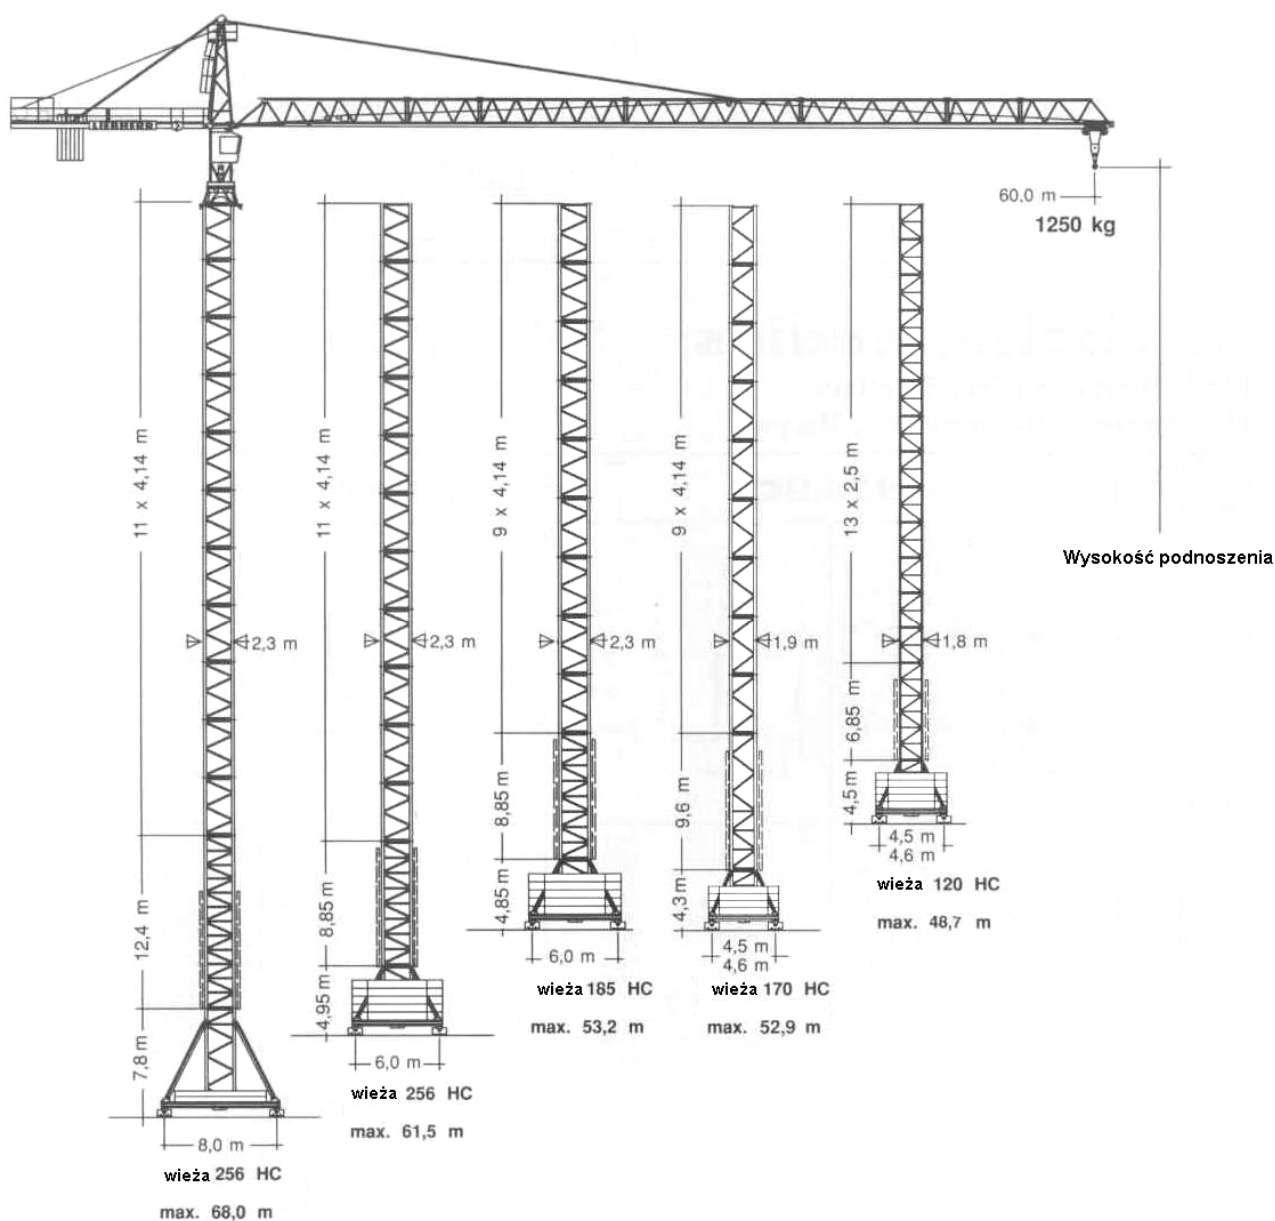
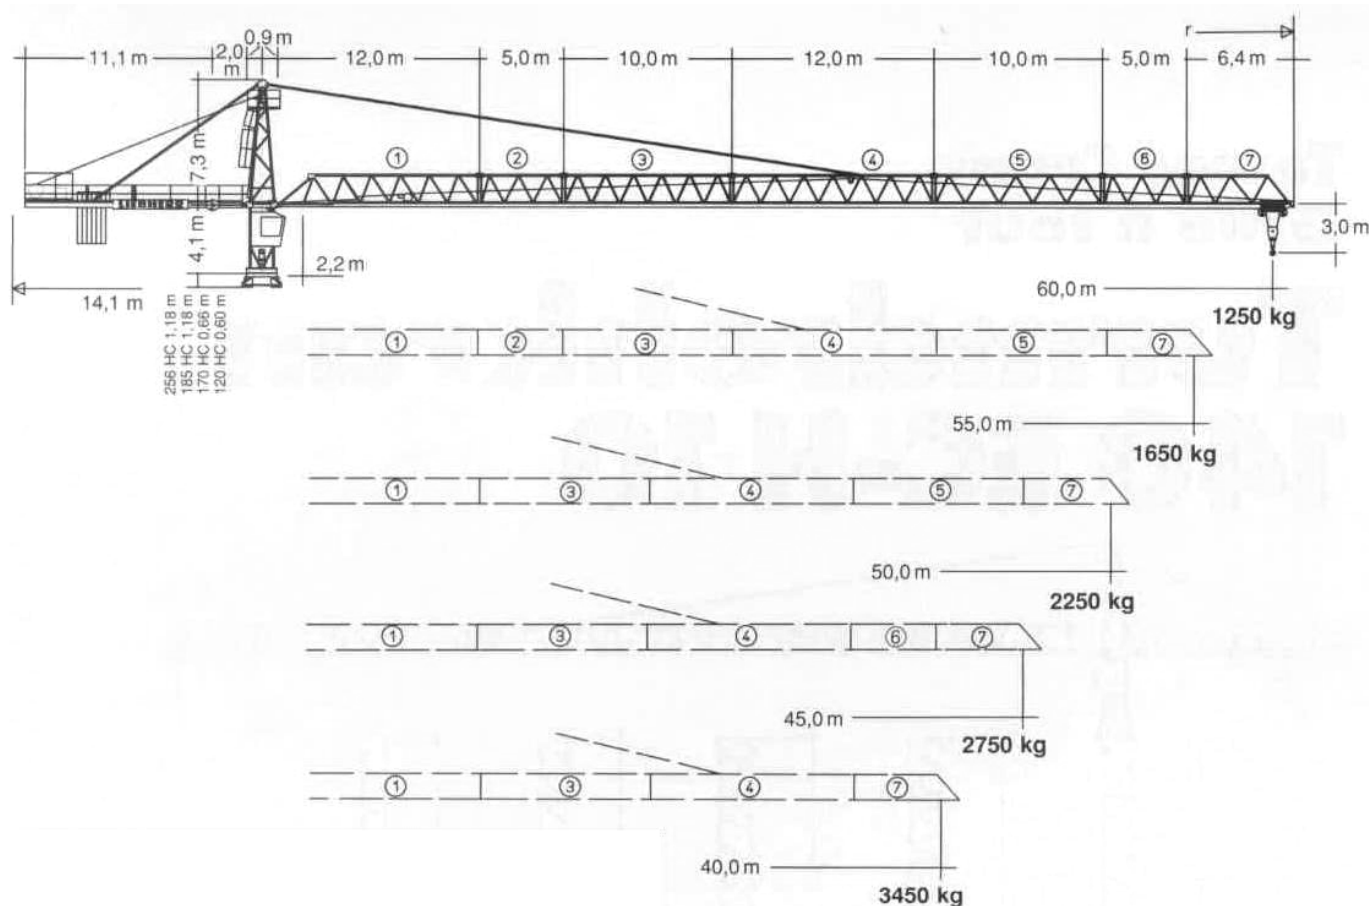


ŻURAW WIEŻOWY LH-140EC-H10





Wysokość podnoszenia:

Z wieżą	256 HC		185 HC		170 HC	
Łączenie z wstawką wieży						
0	m	14,9	22,4	m	11,3	16,1
1		19,0	26,6		15,5	20,2
2		23,2	30,7		19,6	24,3
3		27,3	34,8		23,7	28,4
4		31,4	39,0		27,9	32,6
5		35,6	43,1		32,0	36,7
6		39,7	47,3		36,1	40,9
7		43,9	51,4		40,3	45,0
8		48,0	55,6		44,4	49,2
9		52,2	59,7		48,5	53,3
10		56,3	63,8		52,7	57,4
11		60,4	68,0*		56,8*	61,5*
12		64,6*	-		-	-
Promień wnętrza krzywej		18,0 m	12,5 m		12,0 m	8,5 m



TADEX-ŻURAWIE, 62-030 LUBOŃ, ul. Romana Maya 1, NIP:666-120-48-14
 Regon:634298030, www.dzwigi-budowlane.pl, tadex@tadex.strefa.pl
 tel/fax +48 061 8900484, kom. +48 0601 149 358



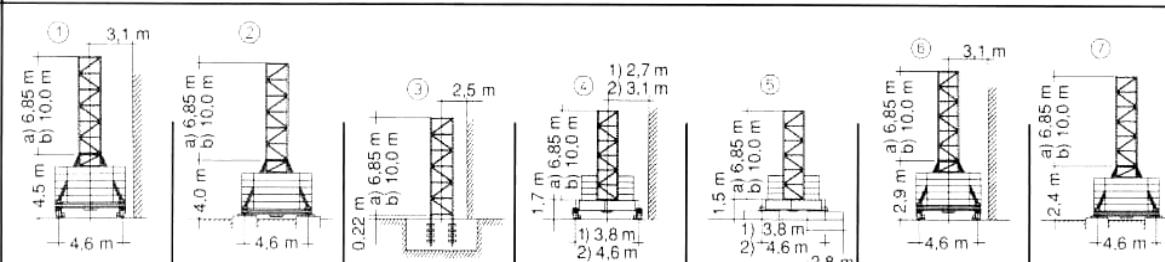
Z wieżą	120 HC							
Łącznie z wstawką wieży								
0	a) 13,0 b) 16,2	a) 12,5 b) 15,7	a) 8,8 b) 12,0	a) 10,2 b) 13,4	a) 10,0 b) 13,2	a) 11,4 b) 14,6	a) 10,9 b) 14,1	
1	15,5 18,7	15,0 18,2	11,3 14,5	12,7 15,9	12,5 15,7	13,9 17,1	13,4 16,6	
2	18,0 21,2	17,5 20,7	13,8 17,0	15,2 18,4	15,0 18,2	16,4 19,6	15,9 19,1	
3	20,5 23,7	20,0 23,2	16,3 19,5	17,7 20,9	17,5 20,7	18,9 22,1	18,4 21,6	
4	23,0 26,2	22,5 25,7	18,8 22,0	20,2 23,4	20,0 23,2	21,4 24,6	20,9 24,1	
5	25,5 28,7	25,0 28,2	21,3 24,5	22,7 25,9	22,5 25,7	23,9 27,1	23,4 27,6	
6	28,0 31,2	27,5 30,7	23,8 27,0	25,2 28,4	25,0 28,2	26,4 29,6	25,9 29,1	
7	30,5 33,7	30,0 33,2	26,3 29,5	27,7 30,9	27,5 30,7	28,9 32,1	28,4 31,6	
8	33,0 36,2	32,5 35,7	28,8 32,0	30,2 33,4	30,0 33,2	31,4 34,6	30,9 34,1	
9	35,5 38,7	35,0 38,2	31,3 34,5	32,7 35,9*	32,5 35,7*	33,9 37,1	33,4 36,6	
10	38,0 41,2	37,5 40,7	33,8 37,0	35,2* 38,4*	35,0* 38,2*	36,4 39,6	35,9 39,1	
11	40,5 43,7	40,0 43,2	36,3 39,5	37,7*	-	38,9 42,1	38,4 41,6	
12	43,0* 46,2*	42,5* 45,7*	38,8 42,0	-	-	41,4* 44,6*	40,9* 44,1*	
13	45,5* 48,7*	45,0* 48,2*	41,3* 44,5*	-	-	43,9* 47,1*	43,4* 46,6*	
14	- -	- -	43,8* 47,0*	- -	- -	- -	- -	
15	- -	- -	- -	- -	- -	- -	- -	

Tabela udźwigu:

Długość wysięgnika		max. kg	m/kg																							
m	r		m/kg	14,0	16,0	18,0	20,0	22,0	24,0	26,0	28,0	30,0	32,0	34,0	36,0	38,0	40,0	42,0	45,0	48,0	50,0	52,0	55,0	58,0	60,0	
60,0	(r = 61,4)	2,2 – 12,0 10000	8390	7220	6310	5580	4990	4500	4080	3720	3410	3140	2900	2690	2500	2330	2170	1960	1790	1680	1580	1450	1320	1250		
55,0	(r = 56,4)	2,2 – 13,0 10000	9200	7930	6940	6150	5500	4970	4510	4120	3790	3490	3230	3000	2800	2610	2440	2220	2020	1910	1800	1650				
50,0	(r = 51,4)	2,2 – 14,6 10000	10000	9010	7900	7010	6290	5690	5180	4740	4360	4030	3740	3480	3250	3040	2850	2600	2380	2250						
45,0	(r = 46,4)	2,2 – 15,2 10000	10000	9430	8270	7350	6590	5970	5430	4980	4580	4240	3940	3670	3420	3210	3010	2750								
40,0	(r = 41,4)	2,2 – 16,1 10000	10000	10000	8810	7840	7040	6370	5810	5320	4910	4540	4220	3940	3680	3450										

Max.udźwig (kg)	10000																										
	8000																										
	6000																										
	4000																										
	2000																										
	0																										

Wysięgnik	m	14,0																									
																		</									



Tabela szybkości:





	U/min 0,9 sl./min tr./min	1 x 5,0 kW 50 / 55 / 60 m wysięgnik 2 x 5,0 kW
	11,0 / 37,0 / 75,0 m/min	5,0 kW
	25,0 m/min	2 x 3,0 kW (120 HC) 2 x 7,5 kW (256 HC) (185 HC, 170 HC)
Wymagana moc (Górna część)		wciągarka
		34 kW 45 kW
kW		49,0 60,0
kVA		54,0 67,0

Wciągarka		Moc	kg	m/min
34,0 / 30,0 kW WIW 240 RX Elmag, WSB Wysokość podnoszenia 93m (4 warstwy)	1	10000	5600	1,2 / 12,0 25,0
	2	3000	1000	5,2 / 52,0 104,0
	3	1500	400	8,7 / 87,0 174,0
45,0 kW WIW 260 JX HU-260-001 Elmag, WSB Wysokość podnoszenia 167m (6 warstw)	1	10000		1,1 / 17,0
	2	4300		3,0 / 45,0
	3	2300		5,2 / 78,0

Wymiary i wagi:

l.p	ilość	Górne części		L (m)	B (m)	H (m)	kg*
1	1	Kabina z mechanizmem obrotu		120 HC: 5,15 170 HC: 5,20 185 HC: 6,00 256 HC: 6,00	2,44 2,45 2,74 2,74	2,48 2,65 2,65 2,65	7000 7200 7400 7400
2	1	Górny element wieży (sztyca)		7,30	1,48	1,70	1870
3	1	Mechanizm wciągarki		3,60	2,40	1,80	3230
4	1	Odciąg		13,11	2,42	0,57	2850
5	1	Przeciwwysięgnik		13,11	2,42	2,20	7950
6	1	Element wysięgnika		12,24	1,58	1,79	① 2220
7	1	Element wysięgnika		12,30	1,25	1,70	④ 1640
8	2	Element wysięgnika		10,30	1,25	1,70	⑤ 1130 ⑥ 750
9	2	Element wysięgnika		5,25	1,25	1,68	⑥ 370 ② 630
10	1	Element wysięgnika		6,51	1,43	1,88	⑦ 500
11	1	Wózek i hak ładowania		1,90	1,42	1,38	915



					L (m)	B (m)	H (m)	kg*
12	1	Kabina z mechanizmem obrotu i sztycą			12,30	2,44	2,48	8910
13	1	Kabina z mechanizmem obrotu i wstawka wieży			12,00	2,44	2,48	12650
14	1	Wysięgnik i przeciwwysięgnik			8,20	0,55	0,12	1170
					5,87	0,20	0,16	380
Wieża								
15	13 9 9 11	Element wieży			120 HC 2,50 170 HC 4,14 185 HC 4,14 256 HC 4,14	1,80 1,90 2,30 2,30	1,80 1,90 2,30 2,30	1050 1850 2050 2260
16	7 3	Element wieży			120 HC 5,0 120 HC 10,0	1,80 1,80	1,80 1,80	1960 3400
17	1	Podstawa wieży			140 HC 6,85 140 HC 10,00 170 HC 9,60 185 HC 8,85 256 HC 8,85 (12,42)	1,80 1,80 1,90 2,30 2,30 (2,30)	1,80 1,80 1,90 2,30 2,30 (2,30)	2730 3990 4350 4100 4580 (7700)
Sprzęt do wchodzenia								
18	1	Część przewodnika			120 HC 6,45 120 HC 9,60 170 HC 9,04 185 HC 8,39 256 HC 8,39	2,10 2,10 2,31 2,80 2,80	2,42 2,42 2,28 2,50 2,50	2660 4410 4750 5100 5100
19	1	Hydrauliczna jednostka			120 HC 2,87 170 HC 2,00 185 HC 2,30 256 HC 2,30	2,12 1,10 1,25 1,25	1,06 1,00 1,00 1,00	1050 1100 1150 1150
Przeciwwaga								
20	2	Wózek z napędem			120 HC 1,38 170 HC 1,46 185 HC 1,46 256 HC 1,63 (1,46)	0,88 0,84 0,84 0,92 (0,84)	0,87 0,87 0,87 0,95 (0,87)	980 1080 1080 1450 (1080)
21	2	Wózek bez napędów			120 HC 1,17 170 HC 1,15 185 HC 1,15 256 HC 1,37 (1,15)	0,60 0,60 0,60 0,62 (0,60)	0,87 0,87 0,87 0,95 (0,87)	780 800 800 1120 (800)
22	1	Podpora wysięgnika (długa)			120 HC 7,12 170 HC 7,15 185 HC 9,10 256 HC 9,10 (11,95)	0,78 0,80 0,82 0,80 (0,82)	0,65 0,70 0,74 0,80 (0,80)	950 1070 1350 1650 (2200)
23	2	Podpora wysięgnika (krótka)			120 HC 3,45 170 HC 3,45 185 HC 4,41 256 HC 4,45 (5,58)	0,56 0,60 0,62 0,77 (0,65)	0,55 0,70 0,71 0,77 (0,77)	408 500 615 800 (1035)
24	2+2	Podpora graniczna			120 HC 4,02 170 HC 4,08 - 4,30 185 HC 5,48 - 5,46 256 HC 5,46 - 5,40 (7,52 - 7,46)	0,35 0,16 - 0,33 0,11 - 0,17 0,11 - 0,18 (0,1 - 0,17)	0,12 0,11 - 0,14 0,16 - 0,38 0,16 - 0,38 (0,1 - 0,38)	95 80 - 200 118 - 454 175 - 525 (366 - 912)
25	4	Podpora graniczna			120 HC 3,78 170 HC 3,53 185 HC 4,23 256 HC 4,14 (6,55)	0,15 0,25 0,17 0,18 (0,22)	0,22 0,17 0,25 0,25 (0,25)	200 240 275 320 (600)
26	1	Część podstawy wieży			120 HC 3,50 170 HC 3,30 185 HC 3,73 256 HC 3,73 (6,70)	2,06 2,15 2,52 2,62 (2,53)	2,06 2,15 2,52 2,62 (2,53)	1320 2000 1950 2550 (3800)
27	1	Podpora			120 HC 3,50	1,20	1,00	1000
28	1	Skrzynka z kablami			2,00	1,00	1,00	2000

