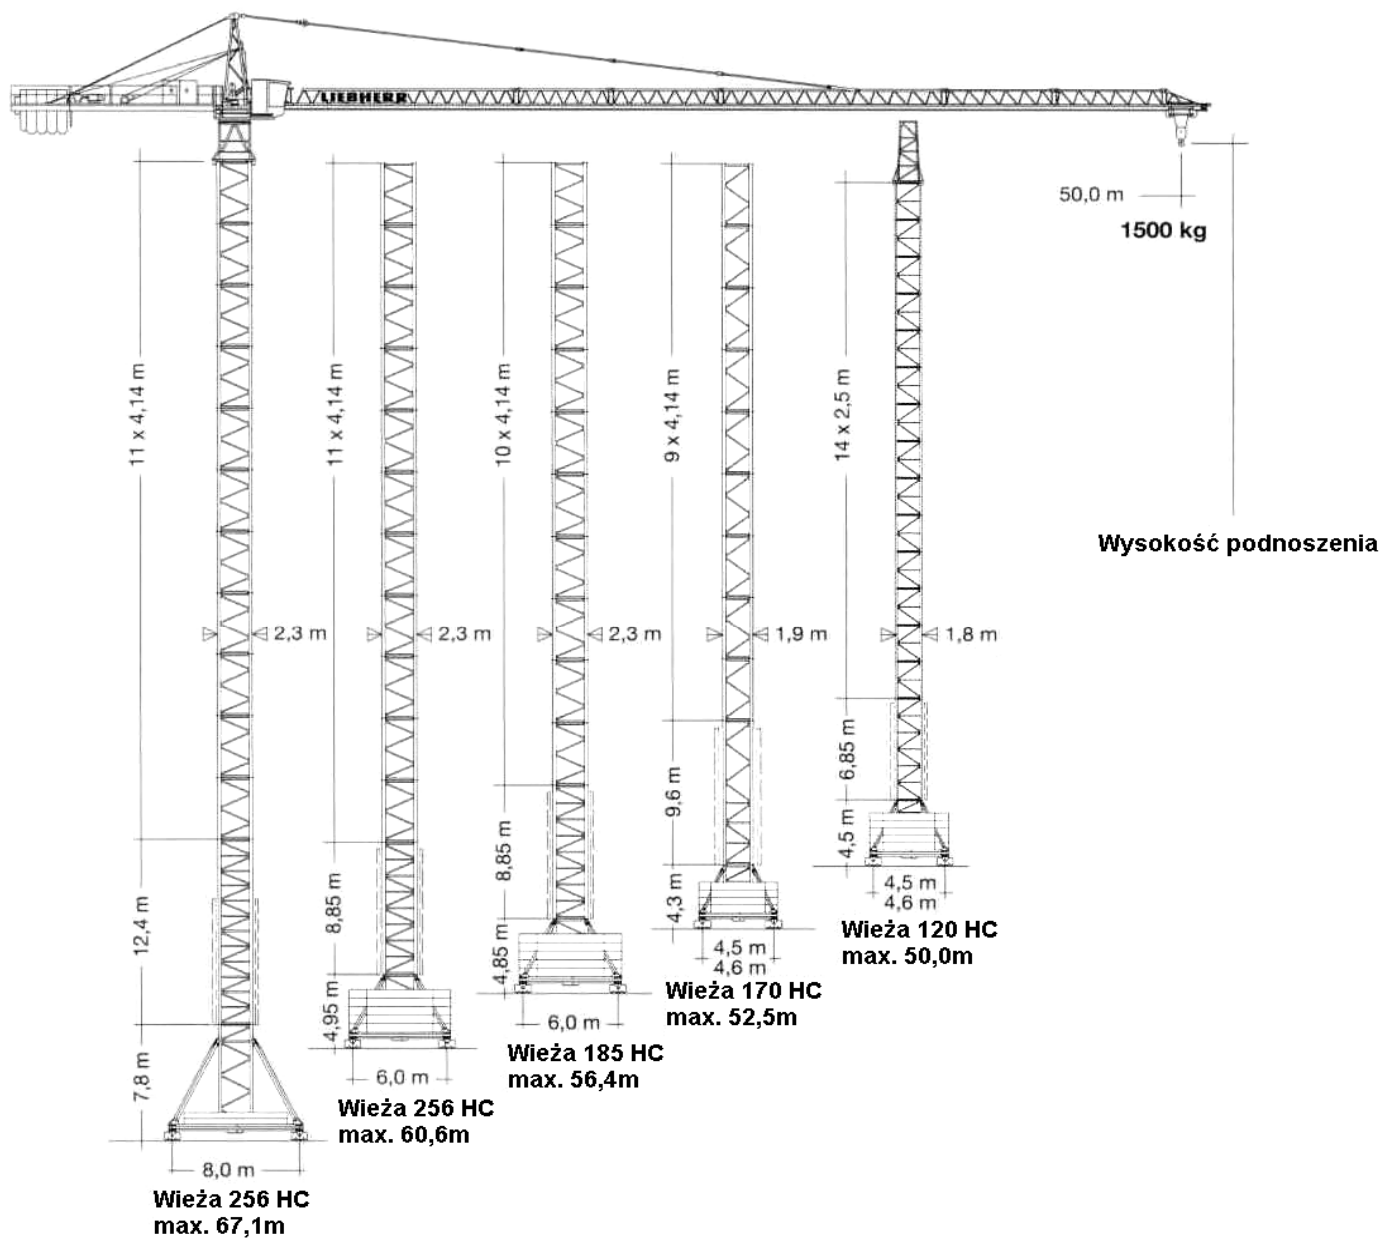


LIEBHERR

T A D E X - Ż U R A W I E

62-030 LUBOŃ - POZNAŃ, ul. Romana Maya 1
tel. / fax +48 61 89 00 484, kom. +48 601 149 358
www.dzwigi-budowlane.pl , tadex@tadex.strefa.pl

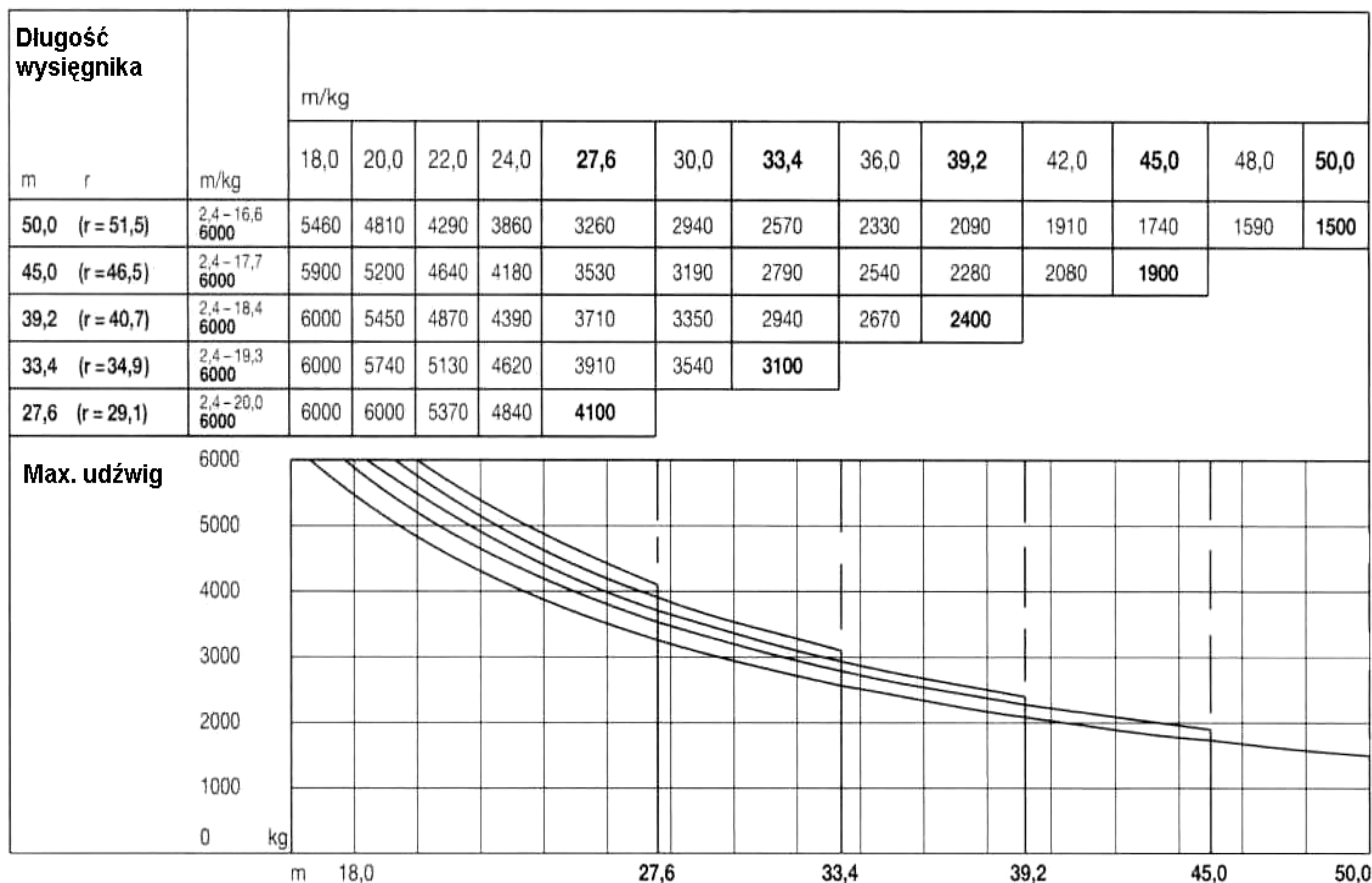
ŻURAW WIEŻOWY LH-91EC



TADEx-ŻURAWIE , 62-030 LUBOŃ, ul. Romana Maya 1 , NIP:666-120-48-14
Regon:634298030 , www.dzwigi-budowlane.pl , tadex@tadex.strefa.pl
tel/fax +48 061 8900484 , kom. +48 0601 149 358




Tabela udźwigu:




	170 HC		185 HC		256 HC		256 HC	
12	-	-	-	-	-	-	63,7*	-
11	-	-	-	-	55,9*	60,6*	59,6	67,1*
10	52,5*	-	51,8*	56,4*	51,8	56,5	55,4	62,9
9	48,4*	52,5*	47,7	52,3	47,6	52,3	51,3	58,8
8	44,2	48,4*	43,5	48,1	43,5	48,2	47,2	54,7
7	40,1	44,2	39,4	44,0	39,4	44,1	43,0	50,5
6	35,9	40,1	35,3	39,9	35,2	39,9	38,9	46,4
5	31,8	35,9	31,1	35,7	31,1	35,8	34,7	42,2
4	27,7	31,8	27,0	31,6	26,9	31,6	30,6	38,1
3	23,5	27,7	22,8	27,4	22,8	27,5	26,5	34,0
2	19,4	23,5	18,7	23,3	18,7	23,4	22,3	29,8
1	15,2	19,4	14,6	19,2	14,5	19,2	18,2	25,7
0	m 11,1	15,2	m 10,4	15,0	m 10,4	15,1	m 14,0	21,5





Tabela szybkości:

	U/min. 0,75 sl./min tr./min	6,3 kW
	10,0 / 40,0 / 80,0 m/min	5,0 kW
	25,0 m/min	2 x 3,0 kW (120 HC) 2 x 7,5 kW (256 HC) (185 HC, 170 HC)
	kVA	22,0 kW 37,5 kW 40,0 54,0

Moc		kg	m/min
 22,0 / 18,0 / 4,0 kW, KL WIW 220 JX 401 60,0 m LS-bęben 3-warstwy	1	6000 6000 3400	3,9 17,6 35,0
	2	3000 3000 1700	7,6 35,3 70,0
	3	1400	6,9 / 103,0

Wymiary i wagi:

I.p	ilość	Górne części	L (m)	B (m)	H (m)	kg
1	1	Maszynownia z kabiną 	12,00	2,44	2,38	10750
2	1	Kabina z podestem 	4,10	1,35	2,20	710
3	1	Część adaptatora 	120 HC 5,00 170 HC 2,41 185 HC 2,41 256 HC 2,41	2,20 2,50 2,70 2,70	2,30 2,30 2,40 2,40	2540 2750 3170 3170
4	1	Mechanizm obrotu 	4,15	1,75	2,15	3620
5	1	Górny element wieży 	5,00	1,30	1,00	1125
6	1	Przeciwwyścięgnik 	L1 11,10 L2 8,20	1,90	2,40	5050
7	1	Wyścięgnik (element) 	11,97	1,02	1,06	⊙ 1607



				L (m)	B (m)	H (m)	kg	
8	1	Wysięgnik (element)		5,20	1,02	1,06	② 701	
				6,00	1,02	1,06	③ 748	
				12,00	1,02	1,06	④ 1400	
				6,03	1,02	1,04	⑤ 425	
				6,03	1,02	1,04	⑥ 340	
9	1	Wysięgnik (element)		2,40	1,14	1,50	⑦ 165	
Wieża								
10		Wstawka wieży		120 HC	2,50	1,80	1,80	1090
				120 HC	5,00	1,80	1,80	1830
				170 HC	4,14	1,90	1,90	1850
				185 HC	4,14	2,30	2,30	2240
				256 HC	4,14	2,30	2,30	2300
11		Dłuższa część wstawki		120 HC	10,0	1,80	1,80	3425
12	1	Część podstawy wieży		120 HC	6,85	1,80	1,80	2610
				120 HC	10,0	1,80	1,80	3530
				170 HC	9,60	1,90	1,90	4350
				185 HC	8,85	2,30	2,30	4280
				256 HC	8,85 (12,42)	2,30 (2,30)	2,30 (2,30)	4830 (7940)
Sprzęt do wchodzenia								
13	1	Część przewodnika		120 HC	6,45	2,10	2,42	2660
				120 HC	9,60	2,10	2,42	4410
				170 HC	9,04	2,31	2,28	4750
				185 HC	8,39	2,80	2,50	4070
				256 HC	8,39	2,80	2,50	4070
14	1	Hydrauliczna jednostka		120 HC	2,87	2,12	1,06	1000
			170 HC	2,30	1,10	1,00	1100	
			185 HC	2,30	1,10	1,00	1100	
			256 HC	2,30	1,10	1,00	1100	
Przeciwwaga								
15	2	Wózek z napędem		120 HC	1,38	0,88	0,87	900
				170 HC	1,46	0,84	0,87	920
				185 HC	1,46	0,84	0,87	920
				256 HC	1,63 (1,46)	0,92 (0,84)	0,95 (0,87)	1690 (920)
16	2	Wózek bez napędu		120 HC	1,17	0,60	0,87	860
				170 HC	1,15	0,60	0,87	880
				185 HC	1,15	0,60	0,87	880
				256 HC	1,37 (1,15)	0,62 (0,60)	0,95 (0,87)	1340 (880)
17	1	Podpora ramienia (długa)		120 HC	7,12	0,78	0,65	950
				170 HC	7,15	0,80	0,70	1070
				185 HC	9,10	0,82	0,74	1350
				256 HC	9,10 (11,95)	0,80 (0,82)	0,80 (0,80)	1650 (2200)
18	2	Podpora ramienia (krótka)		120 HC	3,45	0,56	0,55	408
				170 HC	3,45	0,60	0,70	500
				185 HC	4,41	0,62	0,71	615
				256 HC	4,45 (5,85)	0,77 (0,65)	0,77 (0,77)	800 (1035)
19	2+2	Podpora graniczna		120 HC	4,02	0,35	0,12	95
				170 HC	4,08 - 4,30	0,16 - 0,33	0,11 - 0,14	80 - 200
				185 HC	5,48 - 5,46	0,11 - 0,17	0,16 - 0,38	118 - 454
				256 HC	5,46 - 5,40	0,11 - 0,18	0,16 - 0,38	175 - 525
				(7,52 - 7,46)	(0,1 - 0,17)	(0,1 - 0,38)	(366 - 912)	
20	4	Podpora (rozpórka)		120 HC	3,78	0,15	0,22	200
				170 HC	3,53	0,25	0,17	240
				185 HC	4,23	0,17	0,25	275
				256 HC	4,14 (6,55)	0,18 (0,22)	0,25 (0,25)	320 (600)
21	1	Część podstawy wieży		120 HC	3,50	2,06	2,06	1320
				170 HC	3,30	2,15	2,15	2000
				185 HC	3,73	2,52	2,52	1950
				256 HC	3,73 (6,70)	2,62 (2,53)	2,62 (2,53)	2250 (3800)
22	2	Podstawa krzyżowa z podnośnikami		91 EC	4,6 m	7,00	0,90	3000
					3,8 m	5,90	0,90	2700
23	2	Podstawa krzyżowa jezdna		91 EC	4,6 m	7,00	0,90	2800
					3,8 m	5,90	0,90	2500

